

# GPL 1272 12 7.2


GPL 1272 - 8  
(6-9 20° Eurobat)  
260 - CSB,  
100%



12 (6 )			
7.2A 20-		U	- 1.75 / 25°
2.60			
100A/130A (5 )			
22			
	-15°	+50°	
	-15°	+40°	
	-15°	+40°	
265			
25°			
13.5 - 13.8	25°		
2.16 A ( )		I <sub>max</sub>	
14.4 - 15.0	25°		
	25°	6-	*
F1/F2-Faston Tab 187/250			
ABS ( - - )			



150.9±2.0	64.8±1.0	94.3±1.0	98.6±1.0
-----------	----------	----------	----------

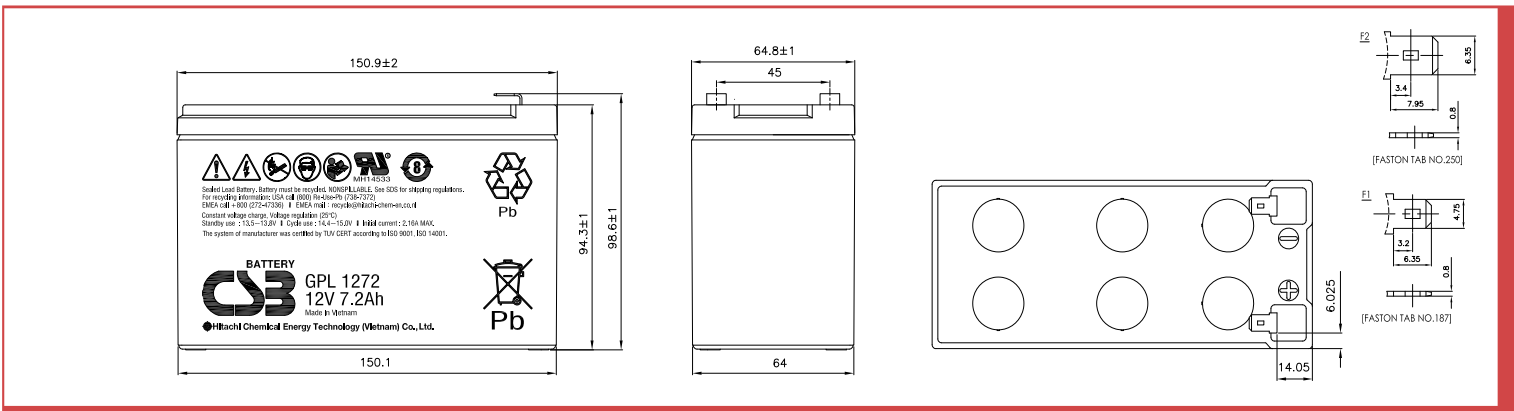

**: A (25° )**

U <sub>k</sub> /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	24.1	19.2	15.6	9.05	4.87	3.43	2.67	1.93	1.29	0.90	0.73	0.39
1.67	23.1	18.3	14.9	8.80	4.72	3.33	2.60	1.89	1.28	0.88	0.72	0.38
1.70	22.6	17.8	14.5	8.68	4.65	3.28	2.56	1.87	1.27	0.87	0.71	0.37
1.75	21.8	17.0	13.9	8.45	4.52	3.20	2.50	1.82	1.23	0.86	0.70	0.36
1.80	20.8	16.2	13.2	8.19	4.39	3.13	2.46	1.77	1.20	0.84	0.69	0.35
1.85	19.6	15.3	12.5	7.87	4.27	3.04	2.39	1.74	1.16	0.82	0.67	0.34

**: / (25° )**

U <sub>k</sub> /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	258	210	173	103	54.0	38.1	29.8	22.0	15.3	10.5	8.78	4.46
1.67	251	202	166	101	53.3	37.4	29.1	21.8	15.0	10.4	8.64	4.40
1.70	247	199	162	99.3	52.9	37.1	28.8	21.6	14.9	10.2	8.57	4.36
1.75	240	192	156	97.4	52.3	36.5	28.2	21.2	14.5	10.1	8.45	4.28
1.80	231	185	151	95.0	51.5	35.8	27.7	20.8	14.1	10.0	8.29	4.20
1.85	222	177	146	92.2	50.6	35.2	27.2	20.4	13.8	9.72	8.14	4.12